

## PREMIUM RANGE WEATHERPROOF LUMINAIRE

951-126 - CYFELCO WP-R 118 LED T8 V2

### PRODUCT DATASHEET


Weatherproof Luminaire designed for use with T8 LED Tubes with reflector

#### Areas of application

- Industrial and - storage facilities
- Car parks and underpasses
- Garages, Workshops, Assembly lines, Warehouses
- General Lighting

#### Product Features

- Evenly distributed light
- Easy installation
- Polycarbonate Housing and Diffuser, Metal Reflector
- TUV Certification
- 3 Years Warranty

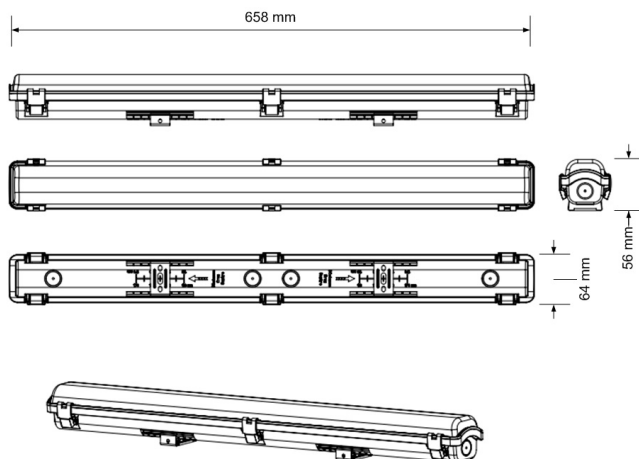

Agios Adrianos, 21100 Nafplio Greece / Europe  
Tel. +302752 091136 | [elmasco@elmasco.eu](mailto:elmasco@elmasco.eu) | [www.elmasco.eu](http://www.elmasco.eu)

LIGHT  
RIGHT

## TECHNICAL DATA

### Operating and Electrical

|                         |                     |
|-------------------------|---------------------|
| Input Voltage           | 220-240V AC         |
| Line Frequency          | 50/60 Hz            |
| Light Source            | <b>LED Tube 9W</b>  |
| Number of light sources | 1 pc (not included) |
| Lamholder Type          | G13                 |
| Dimming                 | Not dimmable        |
| Protection Class        | Class I             |

### Mechanical and Housing

|                  |               |
|------------------|---------------|
| Housing Material | Polycarbonate |
| Reflector        | Metal         |
| Diffuser         | Polycarbonate |
| Housing Color    | Grey          |
|                  |               |
|                  |               |

### Logistics

|                        |             |
|------------------------|-------------|
| Dimensions (L x W x H) | 658x64x56mm |
| Packaging Size         | 670x65x52mm |
| Gross Weight           | xx Kg       |
| Net Weight             | xx Kg       |
|                        |             |

### Application

|                           |                   |
|---------------------------|-------------------|
| Ambient Temperature Range | -25 to +25 °C     |
| Ingress Protection Code   | IP65              |
| Mech. Impact Protection   | IK08              |
| Application Environment   | Indoor/Outdoor    |
| Mounting Type             | Surface/Suspended |
|                           |                   |
|                           |                   |

|           |                  |
|-----------|------------------|
| Packaging | 25pcs per Carton |
|-----------|------------------|

|                         |       |
|-------------------------|-------|
| Carton Box Gross Weight | xx Kg |
|-------------------------|-------|

|                       |       |
|-----------------------|-------|
| Carton Box Net Weight | xx Kg |
|-----------------------|-------|

### Accessories/Options

|              |                           |
|--------------|---------------------------|
| Installation | PC Clips                  |
|              | SS Hanger mounting, hooks |

### Directives

|             |                                                      |
|-------------|------------------------------------------------------|
| 2014/30/EU  | Electromagnetic Compatibility Directive              |
| 2014/35/EU  | Low Voltage Directive                                |
| 2011/65/EU  | Restriction of Hazardous Substances Directive (RoHS) |
| 2009/125/EU | Ecodesign Requirements for energy-related products   |

### Standards

|                              |                                                                                      |
|------------------------------|--------------------------------------------------------------------------------------|
| EN IEC 60598-1:2021/A11:2022 | Luminaires part 1 General Requirements                                               |
| EN IEC 60598-2-1:2021        | Part 2: Particular requirements-Section 1 Fixed general purpose luminaires           |
| EN 62493:2015/A1:2022        | Assessment of lighting equipment related to human exposure to electromagnetic fields |

