

PREMIUM RANGE WEATHERPROOF LUMINAIRE

951-127 - CYFELCO WP-R 136 LED T8 V2

PRODUCT DATASHEET


Weatherproof Luminaire designed for use with T8 LED Tubes with reflector

Areas of application

- Industrial and - storage facilities
- Car parks and underpasses
- Garages, Workshops, Assembly lines, Warehouses
- General Lighting

Product Features

- Evenly distributed light
- Easy installation
- Polycarbonate Housing and Diffuser, Metal Reflector
- TUV Certification
- 3 Years Warranty

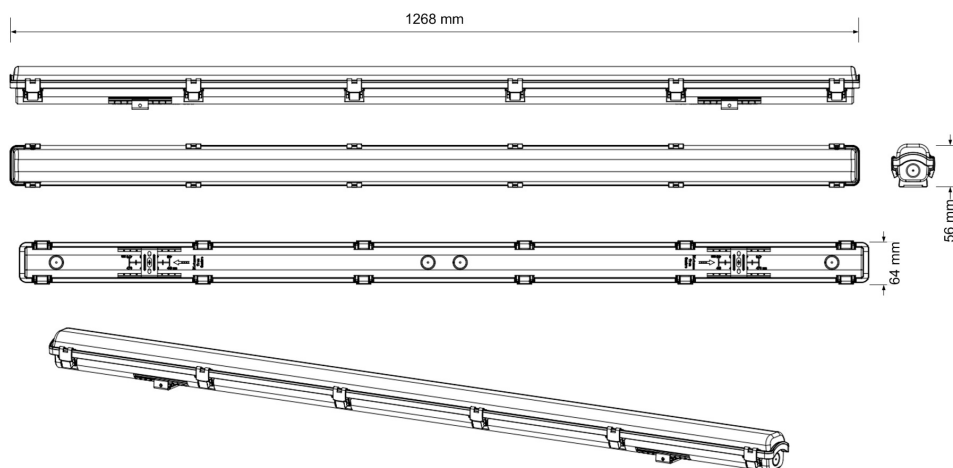

Agios Adrianos, 21100 Nafplio Greece / Europe
Tel. +302752 091136 | elmasco@elmasco.eu | www.elmasco.eu

LIGHT
RIGHT

TECHNICAL DATA

Operating and Electrical

Input Voltage	220-240V AC
Line Frequency	50/60 Hz
Light Source	LED Tube 18W
Number of light sources	1 pc (not included)
Lamholder Type	G13
Dimming	Not dimmable
Protection Class	Class I

Mechanical and Housing

Housing Material	Polycarbonate
Reflector	Metal
Diffuser	Polycarbonate
Housing Color	Grey

Logistics

Dimensions (L x W x H)	1268x64x56mm
Packaging Size	128x6.5x5.2 cm
Gross Weight	xx Kg
Net Weight	xx Kg

Application

Ambient Temperature Range	-25 to +25 °C
Ingress Protection Code	IP65
Mech. Impact Protection	IK08
Application Environment	Indoor/Outdoor
Mounting Type	Surface/Suspended

Packaging	20pcs per Carton
Carton Box Gross Weight	xx Kg
Carton Box Net Weight	xx Kg

Accessories/Options

Installation	PC Clips
	SS Hanger mounting, hooks

Directives

2014/30/EU	Electromagnetic Compatibility Directive
2014/35/EU	Low Voltage Directive
2011/65/EU	Restriction of Hazardous Substances Directive (RoHS)
2009/125/EU	Ecodesign Requirements for energy-related products

Standards

EN IEC 60598-1:2021/A11:2022	Luminaires part 1 General Requirements
EN IEC 60598-2-1:2021	Part 2: Particular requirments-Section 1 Fixed general purpose luminaires
EN 62493:2015/A1:2022	Assessment of lighting equipment related to human exposure to electromagnetic fields

